

Semiconductor & Special Protection

Protistor® Cylindrical fuse-links 10x38 gR 690VAC from 1 to 32A

The 10x38 gR cylindrical is a fast acting, full range fuse used in the protection of inverters, UPS, variable speed drives and other discrete semiconductor devices.

Benefits

- International 10x38 mm (1-1/2" x 13/32") for worldwide acceptance
- Extremely fast acting
- Eliminate all overloads
- Current limiting
- Low I²t for improved semiconductor protection
- Excellent cycling capability
- gR Class according to VDE 636-23 and IEC 60269-4


Applications

- Protection of small inverters, UPS systems, motor drives and similar 700V or less equipment.



Rated Voltage (V)	Nominal Current (A)	Class	Catalog Number	Reference Number
690	1	gR	FR10GR69V1	L1014563
690	1.25	gR	FR10GR69V1.25	N1014565
690	1.5	gR	FR10GR69V1.5	P1014566
690	2	gR	FR10GR69V2	Q1014567
690	2.5	gR	FR10GR69V2.5	T1014570
690	3	gR	FR10GR69V3	V1014571
690	4	gR	FR10GR69V4	W1014572
690	5	gR	FR10GR69V5	X1014573
690	6	gR	FR10GR69V6	Y1014574
690	8	gR	FR10GR69V8	Z1014575
690	10	gR	FR10GR69V10	A1014576
690	12.5	gR	FR10GR69V12.5	C1014578
690	16	gR	FR10GR69V16	D1014579
690	20	gR	FR10GR69V20	E1014580
690	25	gR	FR10GR69V25	F1014581
690	30	gR	FR10GR69V30	G1014582
690	32	gR	FR10GR69V32	H1014583

Dimensions (mm)

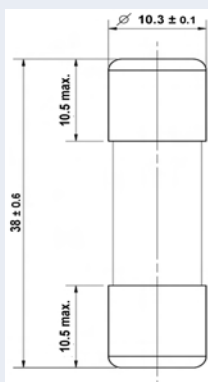

Ratings

- 690VAC IEC 60269-4 and 700VAC UL Recognized
- 500VDC UL Recognized

Approvals

- UL/CSA Recognized Component
- AC: UL Guide No. E76491
- IEC 60269-4 Compliance
- RoHS Compliant



Related products

Fuse-holders: Modulostar® CMS10

Product weight: 10g max.
 Packaging: 10 pieces

Semiconductor & Special Protection

Protistor® Cylindrical fuse-links

10x38 gR 690VAC from 1 to 32A



Rated Voltage (V)	Nominal Current (A)	Breaking Capacity @ Rated Voltage (kA)	Pre-arcing I ^{2t} (A ^{2s})	Clearing I ^{2t} @ Rated Voltage (A ^{2s})	Watts Loss @ 100% In (W)	Watts Loss @ 80% In (W)
690	1	160	0.17	0.48	0.8	0.4
690	1.25	160	0.18	0.55	1.5	0.8
690	1.5	160	0.31	0.80	1.2	0.6
690	2	160	0.94	2.5	1.3	0.7
690	2.5	160	1.65	4.5	1.4	0.8
690	3	160	2.83	7.8	1.5	0.9
690	4	160	6.7	12	1.7	1.0
690	5	160	7.5	30	0.9	0.6
690	6	160	8.5	40	1.4	0.8
690	8	160	5.4	35	1.9	1.1
690	10	160	6.7	55	2.1	1.2
690	12.5	160	11	90	2.8	1.3
690	16	160	19	140	3.0	1.7
690	20	160	39	245	3.7	2.1
690	25	160	69	425	4.3	2.4
690	30	160	107	675	4.8	2.7
690	32	160	154	945	5.1	2.8


Semiconductor & Special Protection

Protistor® Cylindrical fuse-links


10x38 gR 690VAC from 1 to 32A



Time current characteristics
1 to 4A

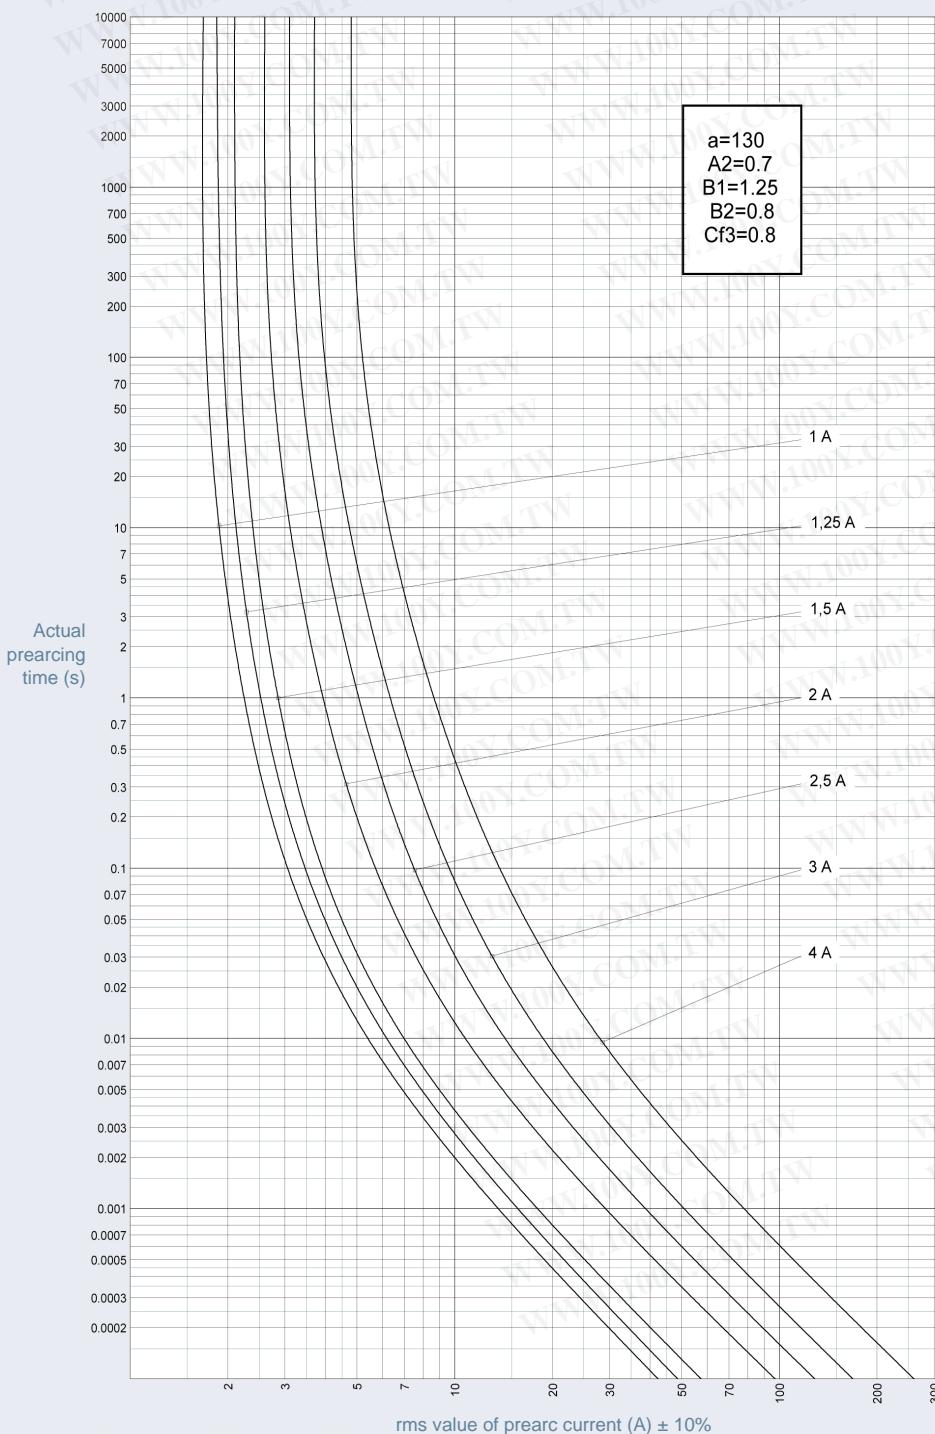

Peak arc voltage
1 to 4A

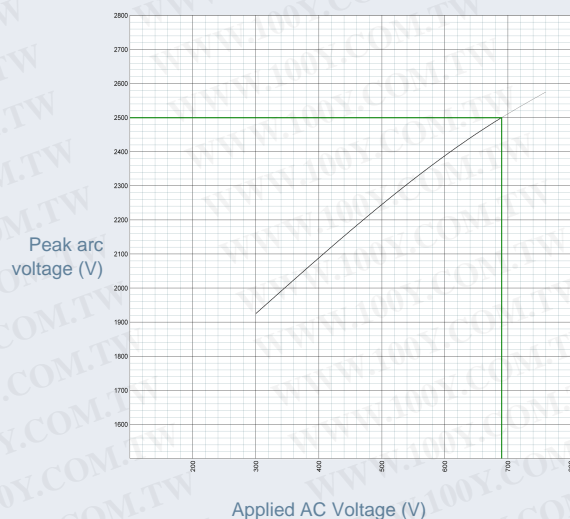


Semiconductor & Special Protection

Protistor® Cylindrical fuse-links

10x38 gR 690VAC from 1 to 32A




**I²t multiplier coefficient
1 to 4A**

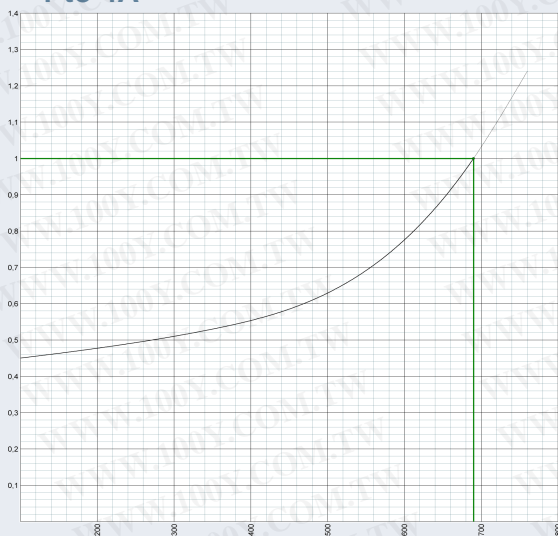

Clearing I²t and arcing time correction factor

Applied AC voltage (V)

**L/R time constant vs DC voltage capability
1 to 4A**

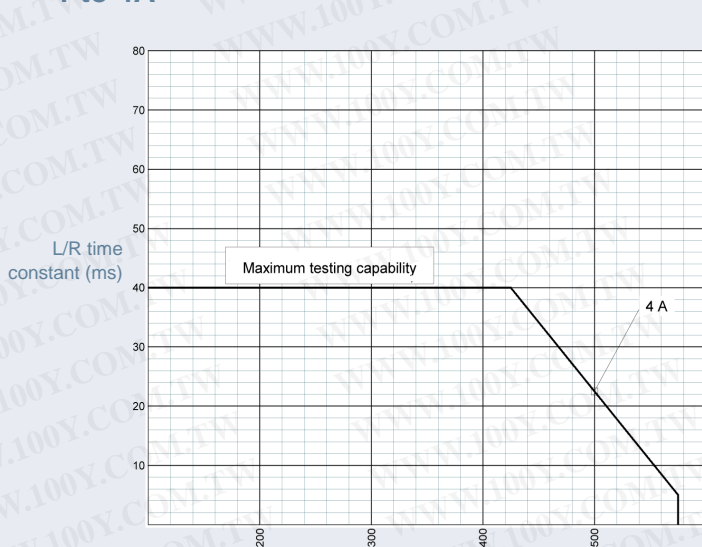


L/R time constant (ms)

Maximum testing capability

4 A

DC voltage capability (V)

**Peak let thru characteristics
1 to 4A**

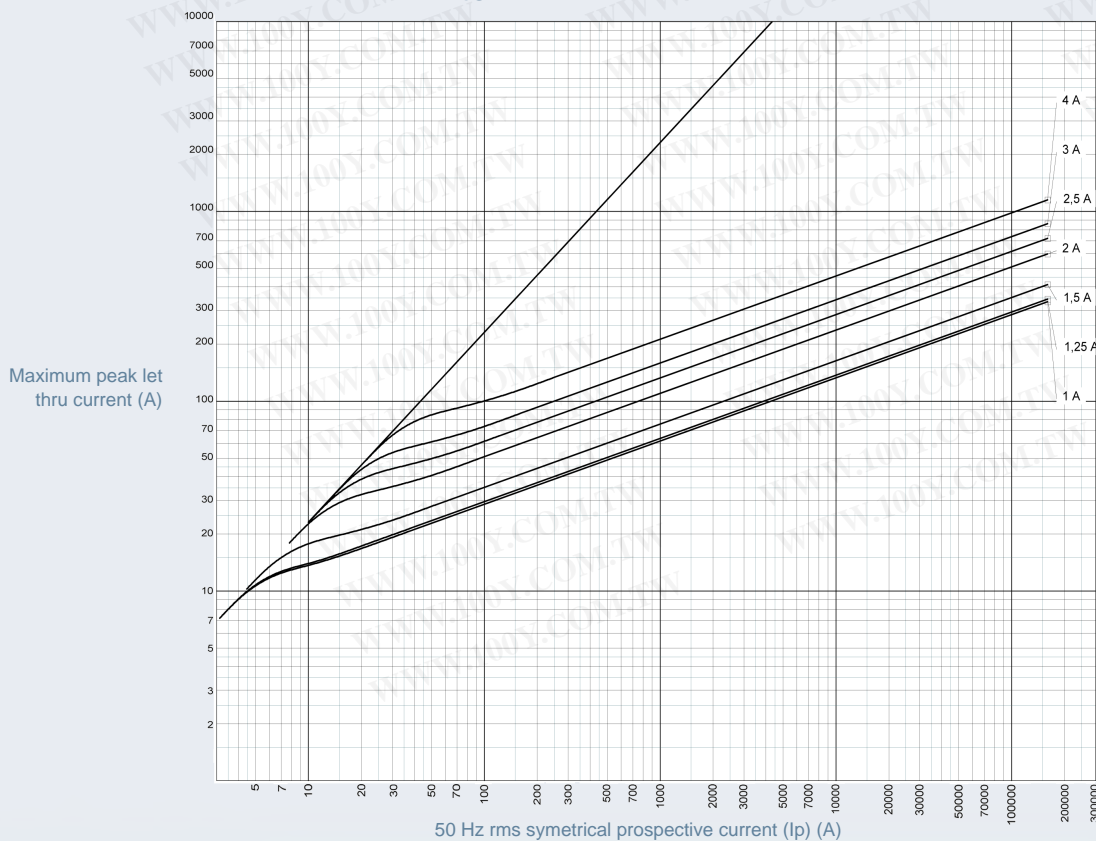

Maximum peak let thru current (A)

50 Hz rms symmetrical prospective current (Ip) (A)


Semiconductor & Special Protection

Protistor® Cylindrical fuse-links


10x38 gR 690VAC from 1 to 32A



Time current characteristics
5 to 32A

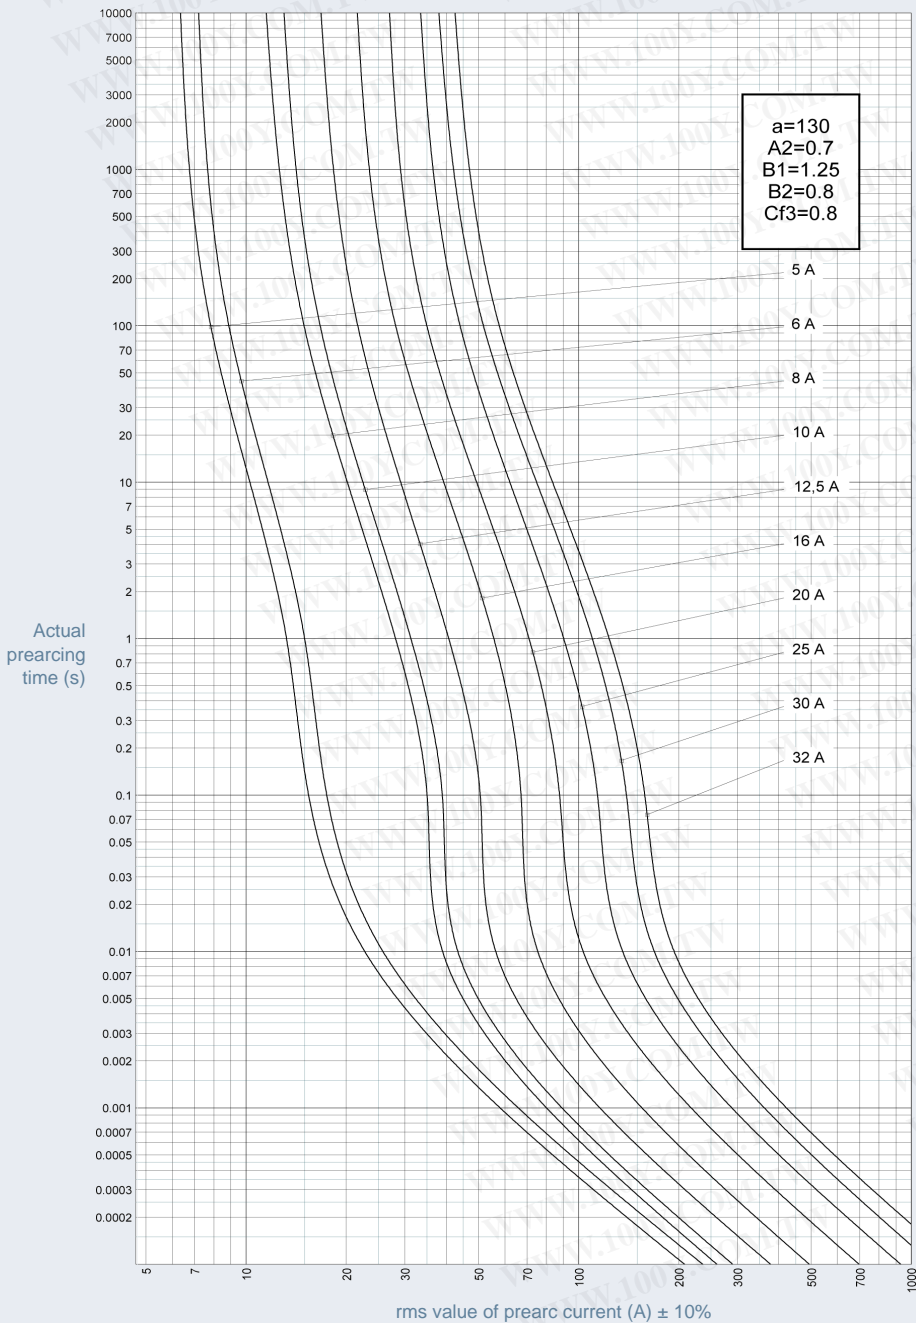

Peak arc voltage
5 to 32A

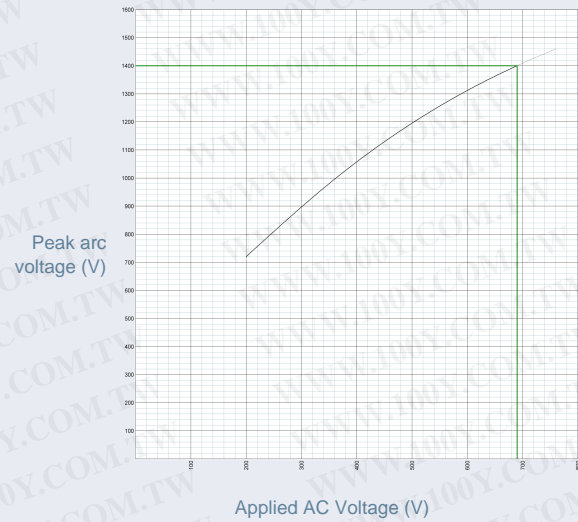


Semiconductor & Special Protection

Protistor® Cylindrical fuse-links

10x38 gR 690VAC from 1 to 32A


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

I²t multiplier coefficient
5 to 32A

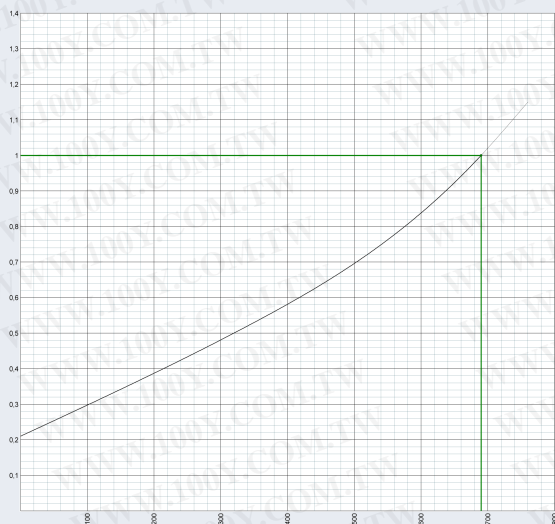


Clearing I²t and arcing time correction factor

L/R time constant vs DC voltage capability
5 to 32A

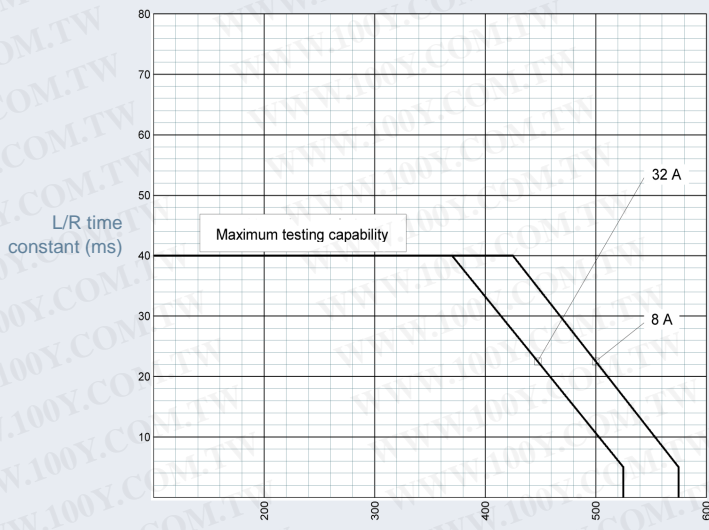

Maximum testing capability

Peak let thru characteristics
5 to 32A

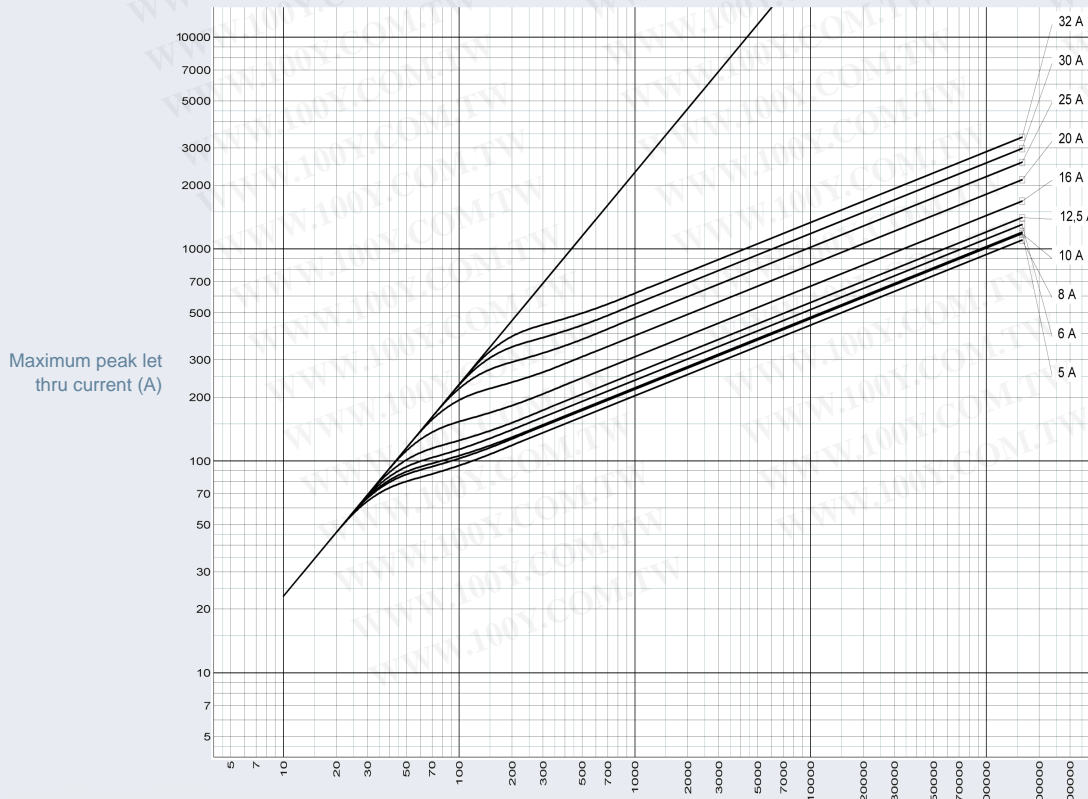

Maximum peak let thru current (A)

50 Hz rms symmetrical prospective current (Ip) (A)