

1

2


3

4


### 1. Main parameters:

Part No.	DNF07-R-100A (H)
Rated voltage ( $V_R$ )	440V/50~60Hz
Rated current	100A
Voltage proof	2500Vdc, 5s
Capacitance (C)	1. $1\mu F + 1.1\mu F \pm 20\%$
Temperature	-40°C, +85°C
RoHS	Compliant
Max.torque: stud/terminal	2. 5Nm

### 2. Circuit Diagram

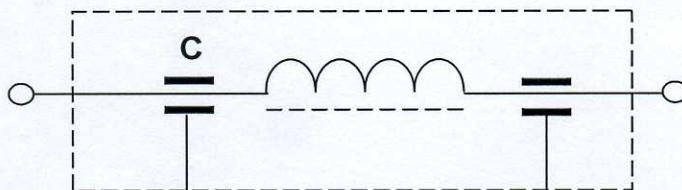

### 3. Dimensions (mm)

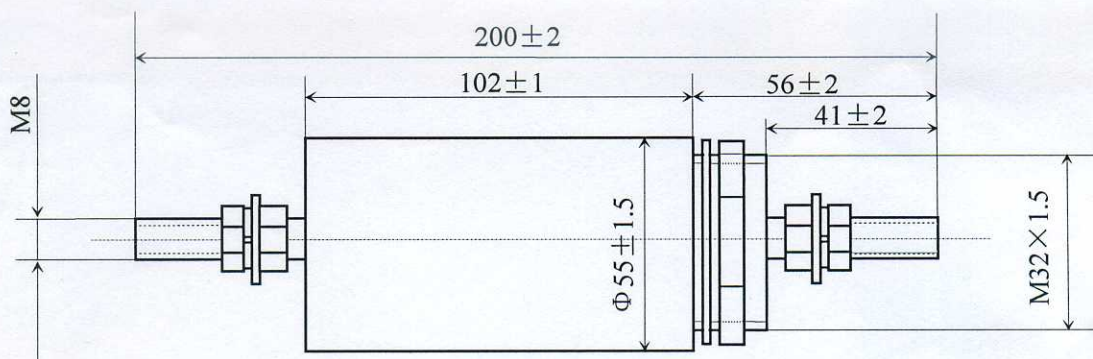

### 4. Insertion loss: Within 50 $\Omega$ System Insertion loss

0. 1 MHz	0. 5MHz	1MHz	5MHz	10MHz	50MHz	100MHz	500 MHz
27dB	43 dB	58dB	67dB	78dB	85dB	85dB	85 dB

	Signatur	Date	DNF07-R-100A (H) RFI FILTER SPECIFICATION	AD2.830.8989JG	
Draft out	<i>[Signature]</i>	2012.9.6		Rev.: 1.0	AERODEV
Checked by	<i>[Signature]</i>	12.9.6		1.0	
Audited by	<i>[Signature]</i>	12.9.6		Sheet	
Signed by				1	
Approved	<i>[Signature]</i>	20120906	Totalpages		
				1	

1

2

3

4