




Vision is
our mission®

Cable 7pMale - 7pFemale 85m
Article no. 0304400
2019 • DS0960180 EN A 02

Product Data




Dimensions

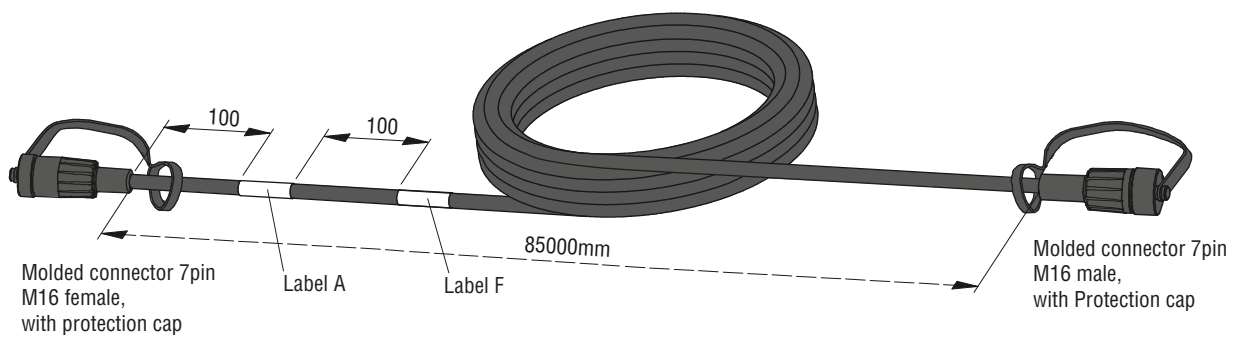

TECHNICAL DATA

Cable 7pMale - 7pFemale 85m


| | |
|----------------------------|--|
| Article number | Description 0304400 |
| Cable length | 85m. |
| Coax | Tinned copper AWG 26 = 1 x 0,14mm ² 18 x 0,1. Shield Spiral braided coverage ≥ 85% 0,4mm. |
| C1,C2,C3 Conductors | 3 x AWG26, 7 x 0,16mm, tinned copper. |
| A1,A2 Conductors | 2 x AWG22, 7 x 0,25mm, tinned copper. |
| Jacket | TPU, 6,0mm +0,0/-0,2mm, Color: Black RAL 9005. |
| Shield | Braided tinned copper, coverage > 85%. |
| Temperature range | -40°...+85°C (static). |
| Impedance coax | 75Ω |
| Min. bending radius | 7,5 x D static. |
| Connectors | Molded male/female connectors M16 7pins. |
| Approval | Fire resist IEC60332-2, Halogen free DIN VDE 0472 part 815. |



Front side molded
7P Female connector

Electrical connection

- 1 = Coax core (Video)
- 2 = Coax shield (Video GND)
- 3 = Red (Power input)
- 4 = Black (0V)
- 5 = Orange (Rx)
- 6 = Yellow (Tx)
- 7 = Grey (Aux)



Front side molded
7P Male connector

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, IATF 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

